


Efficient ■ Economical ■ Intelligent LEAD FREE SOLDERING STATION

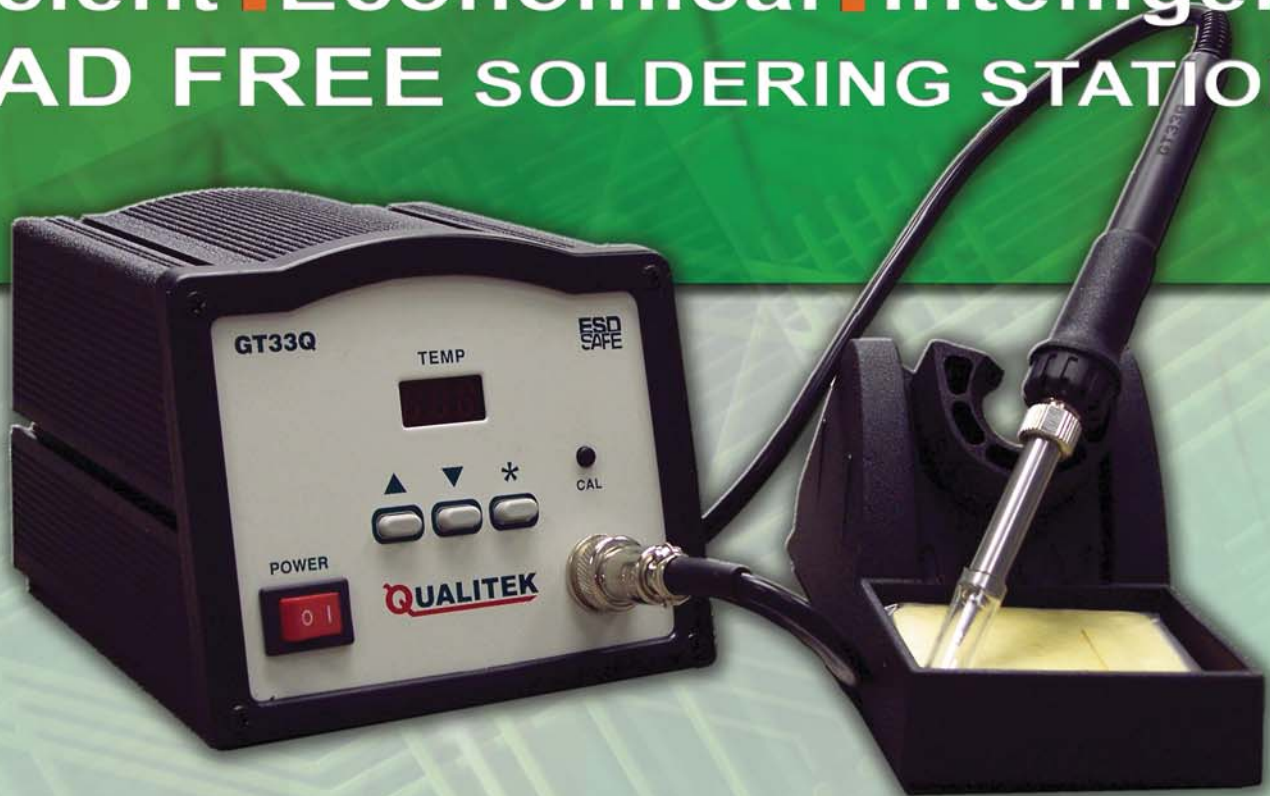

It's Efficient

- A wide variety of tips are available to fit the soldering application.
- Auto-compensates power to tip size.
- Auto-idle prolongs the life of the soldering tip.
- GT33Q reaches a temperature of 300°C/570°F within 20 seconds.

It's Economical

- Priced lower than competitive models.
- New tip design reduces operating cost.

It's Intelligent

- GT33Q calculates and matches power to tip size.
- Idle mode option reduces heat when iron is not in use. Unit will idle after 20 minutes and completely shut down when not in use for 40 minutes.
- The tip temperature can be password protected ensuring a consistent soldering temperature.

lead free **QUALITEK**
soldering

U.S.A.
Philippines
Singapore
China
U.K.

U.S.A. Tel: 1 800 365 3750
Global Tel: 630 628 8083

www.qualitek.com


GT33Q LEAD FREE SOLDERING STATION




■ Accessories and a wide variety of additional tips are available. Visit our website for complete details.

GT33Q Specifications			
Temperature Range	50°-600°C/125-1100°F	Tip To Ground Resistance	<2Ω (DC)
Stable Temp. Control	±2°C/±36°F	Tip To Ground Potential	<2mV (True RMS)
Input Voltage/Frequency	220v/110v	Auto Idle	Yes
Power Consumption	60W-90W	Temperature Lock Mode	Password Protected
Heat Up Time	20-25 Seconds	ESD Housing	Aluminum
Max Tip Temp. Drop	20°C/68°F	Dimensions (LxWxH)	160x130x100mm/6.3x5.1x3.9in
Heating Source	High Frequency Current	Weight	2kg/4.4lbs.


200-1.2D

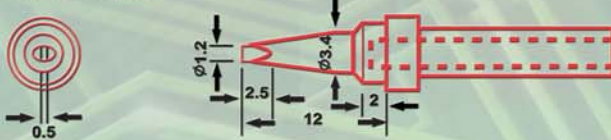


200-2B

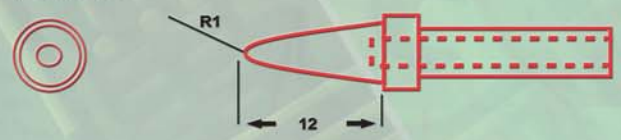


200-1.6D

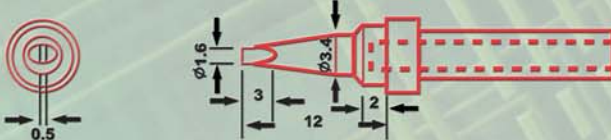


200-I

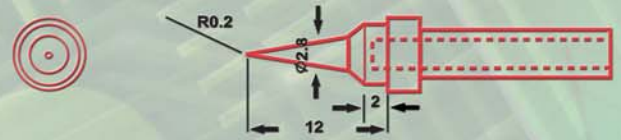


200-LI

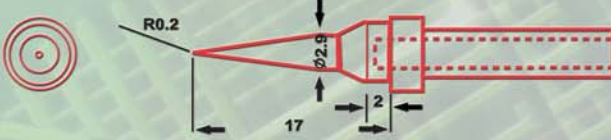


200-0.8C

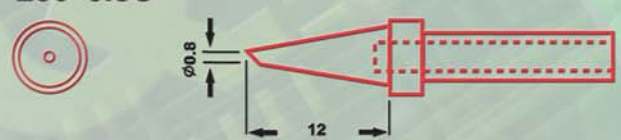


200-SK

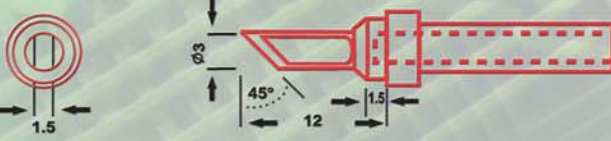


200-3C

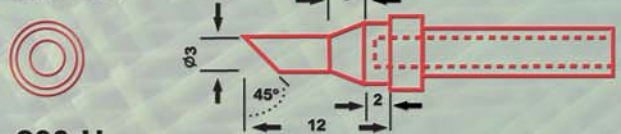

200-J

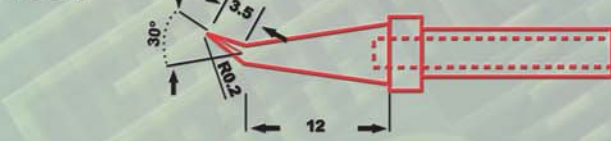

200-H

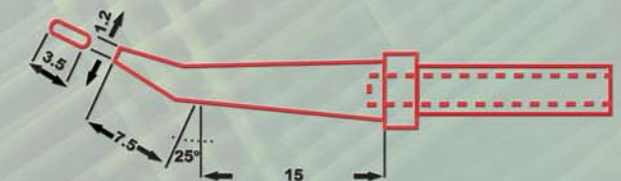

lead free **QUALITEK** soldering

U.S.A.
Philippines
Singapore
China
U.K.

U.S.A. Tel: 1 800 365 3750
Global Tel: 630 628 8083

www.qualitek.com